

Eligible for
Australian Federal
& State Government
incentives including
STC's



AQUA PLUS

All in One

6 Year Warranty*



App. No NSW29118



IMK32348
AS/NZS 2712



WM-032348
AS 3498



Natural refrigerant - low global warming potential




Booster mode produces 75°C max hot water



Noise reduction design provides a super quiet at 43dB



Built-in 1.8kW electric heater gives high efficiency at any conditions



50mm foam insulation ensures stable operation down to -7°C



Patented SPD defrosting technology ensures that the heat pump water heater defrosts quickly at low temperatures



HSA - MELBOURNE
Head Office & Showroom
11 Fiveways Blvd
Keysborough VIC 3173
P: 1300 001 800


HSA - SYDNEY
Showroom & Warehouse
Unit G7, Alexandria Industrial Estate
35-39 Bourke Road, Alexandria NSW 2015
P: 02 7209 6235



enquiries@huntheat.com.au
info@hydroheat.com.au



huntheat.com.au
hydroheat.com.au

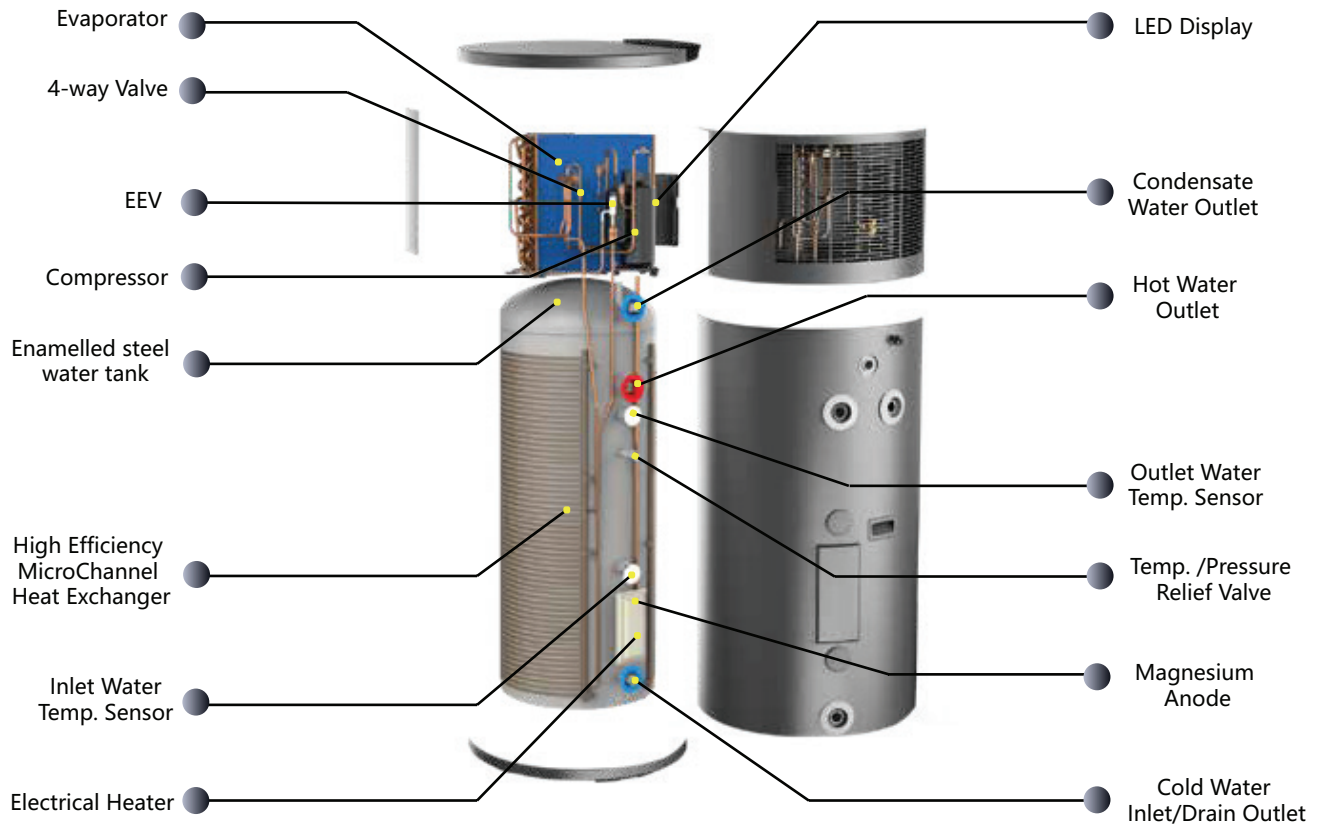

Model		APAIO200	APAIO270
Heating Capacity (kW)*		2.78	2.78
COP		4.15	4.15
Max Input Power (W)		3000	3000
Max Input Current(A)		14	14
Power Supply		220-240v/ 50Hz	220-240v/ 50Hz
Heat Pump	Rated Power (W)	670	670
	Rated Current (A)	3.1	3.1
Electric Heater	Rated Power (W)	1800	1800
	Rated Current (A)	7.5	7.5
Refrigerant		R290	R290
Compressor		GMCC	GMCC
Net Dimension (mm)		626 x 1565	626 x 1880
Package Dimension (mm)		700×700×1667 (including pallet)	700×700×1982 (including pallet)
Net Weight (KG)		104	118
Gross Weight (KG)		115	130
Noise (dB)		43	43
Water tank volume (L)		200	270
Working temperature range (°C)		-7~43	-7~43
*Heating Capacity at Air temp. 20 °C / 15 °C, Water Temperature from 15 °C to 55 °C			